












# GR 560 SPLIT 230 V / 50 Hz

## MODULAR GRANULAR ICE MACHINE SPLIT

### FEATURES CARACTERÍSTICAS

- ▶ **PRODUCES WET GRANULAR ICE.**  
PRODUCE HIELO GRANULAR HÚMEDO.
- ▶ **THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION.**  
EL EVAPORADOR MÁS EFICIENTE DEL MERCADO MENOR GASTO ENERGÉTICO, MAYOR PRODUCCIÓN DE HIELO.
- ▶ **EVAPORATOR WITHOUT GASKETS OR SEALS.**  
EVAPORADOR SIN JUNTAS DE ESTANQUEIDAD NI RETENES.
- ▶ **STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN.**  
HUSILLO DE ACERO INOXIDABLE CON POSTERIOR TRATAMIENTO SUPERFICIAL PARA AUMENTAR SU VIDA ÚTIL.
- ▶ **POWERFUL SPEED REDUCER ON TOP.**  
POTENTE REDUCTOR DE VELOCIDAD EN LA PARTE SUPERIOR.
- ▶ **AISI 304 STAINLESS STEEL BODY.**  
CARROCERÍA EN ACERO INOXIDABLE AISI 304.
- ▶ **ELECTROMECHANICAL CONTROL SYSTEM.**  
SISTEMA ELECTROMECÁNICO DE CONTROL.
- ▶ **ICE DROPS OUT THROUGH THE OPENING ON THE BOTTOM OF THE UNIT.**  
EL HIELO SALE POR UNA ABERTURA EN LA PARTE INFERIOR DE LA UNIDAD.
- ▶ **ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL.**  
INTERRUPTOR LUMINOSO DE FUNCIONAMIENTO ON/OFF EN EL PANEL FRONTAL.
- ▶ **THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER).**  
SE ACONSEJA LA INSTALACIÓN DE UN FILTRO ANTICAL Y LIMPIEZA PERIÓDICA EN CASO DE AGUAS CON CONTENIDO EN CAL MEDIO O ALTO (AGUAS DURAS).



	 24 H	 10°C (Kg)	 10°C (Kg)	 21°C (Kg)	 15°C (Kg)	 (mm)	 (mm)	
GR 560 SPLIT		-	850	Width 525 Depth 410 Height 815	Width 630 Depth 605 Height 985	<b>WET GRANULAR ICE</b> 25% RESIDUAL WATER CONTENT		

### ACCESSORIES ACCESORIOS

#### INCLUDED



#### OPTIONAL (NOT INCLUDED)




### RECOMMENDED BINS DEPÓSITOS RECOMENDADOS




GR 560 SPLIT


RIGHT SIDE VIEW  
VISTA LATERAL DERECHA




FRONTAL VIEW  
VISTA FRONTAL




LEFT SIDE VIEW  
VISTA LATERAL IZQUIERDA



REAR VIEW  
VISTA TRASERA

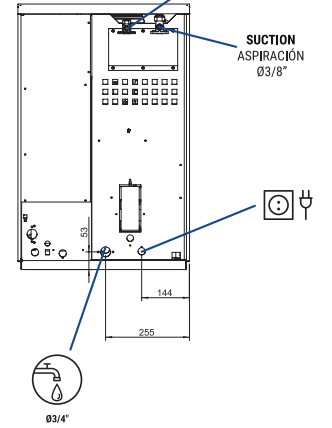

CENTRAL CROSS SECTION  
VIEW OF THE BASE  
VISTA DE LA BASE DESDE  
SECCIÓN CENTRAL




\* All measurements in mm.  
\* Todas las cotas en mm.

OPERATING CONDITIONS CONDICIONES DE OPERACIÓN

PRODUCTION 50Hz PRODUCCIÓN 50 Hz

- ±10% V
- 5°C/43°C
- 5°C/35°C
- WATER 1 bar/6 bar



V	Hz	ph
230	50	1N

GR 560 SPLIT

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	-	-	-	-
50°	-	-	-	-
21°	-	580	-	-
68°	-	-	-	-
32°	-	-	-	-
90°	-	-	-	-
43°	-	-	-	-
109°	-	-	-	-

MODELS MODELOS	Temp. Ev. (°C)	ASHRAE CONDITIONS CONDICIONES ASHRAE (W) (BTu/h)	(W) 43°C	(n.)	(mm <sup>2</sup> )	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W) (BTu/h)	(Kg)	(Kg)	(m <sup>3</sup> )
GR 560 SPLIT	-24°	3.400 11.600	600	3	1,5	10	2,48	24,2	- -	70	91	0,38