

Refrigerated cases


Sushi cases



SUSHI CASE 145



SUSHI CASE 180

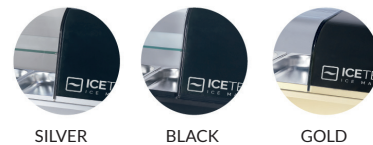

SILVER

BLACK

GOLD

1 Level case



CASE 110 1L 4T




CASE 145 1L 6T




CASE 175 1L 8T



CASE 110 1L 4P




CASE 145 1L 6P



CASE 175 1L 8P


2 Level case




CASE 110 2L 4T




CASE 145 2L 6T




CASE 175 2L 8T



CASE 110 2L 4P



CASE 145 2L 6P



CASE 175 2L 8P

General features

- Anodized aluminium external strip, available in black, silver or gold.
- Independent access to condensing unit without touching food space.
- Curved safety glass tempered, lifts up to remove for cleaning.
- **EASYSKLEIN TRAYS SYSTEM®**, in stainless steel without drains, usually non hygienics.
- GN 1/3 x 40mm trays included inside all tray models.
- LED lighting.
- Digital thermostat to set temperature.
- Available 220V/50Hz, 115V/60Hz.
- Sliding smoked glass doors.
- Automatic defrost time program adjustable (except SUSHI CASE).

Sushi case additional features


- Double evaporator (up & down) to keep exactly T° inside case.
- Keeps humidity and temperature levels without air circulation to avoid dry out fish.
- **ZERO CONDENSATION SYSTEM®**, inside case when running.
- No defrost time required.
- Reach nominal low temperature +1°C/-1°C in a few minutes from switch on.
- **ANTIBACTERIAL EVAPORATOR SYSTEM DESIGN®**, made by an easysklean tube avoiding fins systems.
- Room temperature sensor for maximum control.
- Aluminium external strip available in black or silver colour.



SILVER




BLACK



GOLD

Model

Sushi 1L case

	Storage Volume L*	Number Trays GN 1/3	Plates Capacity n°	Maximun Power Input 27°C Kw	Compressor hp	Temperature Inside a 27°C Ambiente	Display Surface M2*	Net Gross Kg.	 WITH x DEPTH x HEIGHT Dimensions mm..
SUSHI CASE 145	11,7	-	6	0,13	1/6	3°C	0,37	34/49	1447 x 387 x 240
SUSHI CASE 180	15,6	-	8	0,13	1/6	3°C	0,47	37/52	1797 x 387 x 240

1 Level case

				Maximun Power Input 32°C Kw		Temperature Inside a 32°C Ambiente			
CASE 110 1L 4T	7,7	4	-	0,13	1/6	+4°C/+8°C	0,27	28/40	1092 x 387 x 240
CASE 110 1L 4P	7,7	-	4	0,13	1/6	+4°C/+8°C	0,27	28/40	1092 x 387 x 240
CASE 145 1L 6T	11,7	6	-	0,13	1/6	+4°C/+8°C	0,37	35/45	1447 x 387 x 240
CASE 145 1L 6P	11,7	-	6	0,13	1/6	+4°C/+8°C	0,37	35/45	1447 x 387 x 240
CASE 175 1L 8T	15,6	8	-	0,13	1/6	+4°C/+8°C	0,47	38/53	1747 x 387 x 240
CASE 175 1L 8P	15,6	-	8	0,13	1/6	+4°C/+8°C	0,47	38/53	1747 x 387 x 240

2 Level case

CASE 110 2L 4T	7,7	4	4	0,13	1/6	+4°C/+8°C	0,27	38/50	1092 x 385 x 360
CASE 110 2L 4P	7,7	-	8	0,13	1/6	+4°C/+8°C	0,27	38/50	1092 x 385 x 360
CASE 145 2L 6T	11,7	6	6	0,13	1/6	+4°C/+8°C	0,37	43/55	1447 x 385 x 360
CASE 145 2L 6P	11,7	-	12	0,13	1/6	+4°C/+8°C	0,37	43/55	1447 x 385 x 360
CASE 175 2L 8T	15,6	8	8	0,13	1/6	+4°C/+8°C	0,47	48/62	1747 x 385 x 360
CASE 175 2L 8P	15,6	-	16	0,13	1/6	+4°C/+8°C	0,47	48/62	1747 x 385 x 360

* STORE VOLUME & DISPLAY SURFACE REFER TO TRAYS MODELS