

**PS**

Paddle system



**ICETECH**  
ICE MAKERS





Just ideal! The best cube our drink and our ice machine can get!


Large volume and finger sized cubes for efficient cooling with maximum heat transfer in the hottest of ambient temperatures.

**ICE TECH PS** is fully electromechanical controlled without injectors or pump, which makes it extremely reliable in the toughest water conditions.

The high grade food safe stainless steel and superior density insulation will ensure quality with optimized energy consumption.

## Technical features / Operating limits

Ice Cube	20gr. adjustable soft & long lasting.
Body	AISI 304 Stainless Steel.
Paddle system	The <b>ICE TECH PS</b> machine are unaffected by limescale or bad water quality. No pump and no spray.
Electromechanical control	Simple, easy to understand and service. High reliability and low spare parts cost.
Switch	External On/Off switch.
Tropicalized machines	Class T
Operating conditions	Air temperature: 10 - 43°C Water temperature: 5 - 38°C Water pressure: 0,7 - 6 bar
Ice Production capacity	Kg/24h at Ambient temperature 21°C, Water temperature 15°C.
Certification	ISO 9001, CE
Others	Refrigerant R452A & R290 Water inlet connection Ø=3/4" Gas Drain connection Ø=20 mm Single-phase input 220V-50Hz. / Optional: 220V-60Hz

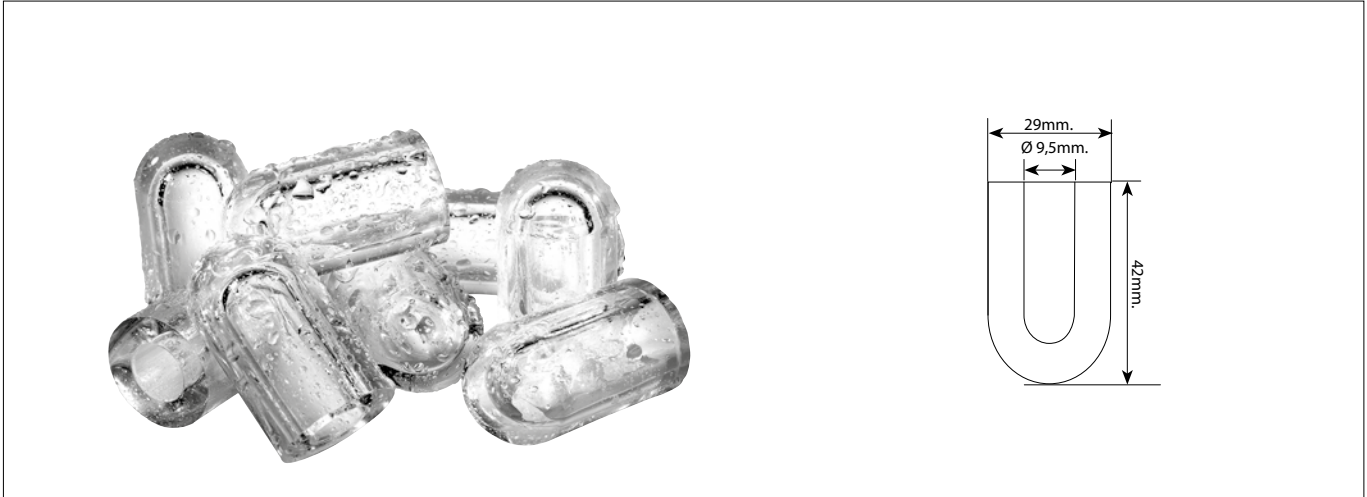

### ICE TECH PS 22 R290



401 x 506 x 643\* mm

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51320U	22	230 / 50 / 1	6	36	
Water	51321U	24	230 / 50 / 1	6	36	

Packed shipping info: Packed dimensions (LxPxX): 495 x 605 x 760 mm - Weight: 40 kg - Packed volume: 0,23 m<sup>3</sup>

\*Legs +12-20mm

### ICE TECH PS 22 PLUS R290



401 x 506 x 643\* mm

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)
Air	51400U	22	230 / 50 / 1	12	36
Water	51401U	24	230 / 50 / 1	12	36

Packed shipping info: Packed dimensions (LxPxX): 495 x 605 x 810 mm - Weight: 40 kg - Packed volume: 0,23 m<sup>3</sup>

\*Legs +12-20mm

### ICE TECH PS 32 R290



401 x 506 x 643\* mm

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51330U	34	230 / 50 / 1	12	39	
Water	51331U	36	230 / 50 / 1	12	39	

Packed shipping info: Packed dimensions (LxPxX): 495 x 605 x 810 mm - Weight: 42 kg - Packed volume: 0,24 m<sup>3</sup>

\* Legs + 12-20 mm



401 x 506 x 699\* mm

### ICE TECH PS 42 R290

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51340U	40	230 / 50 / 1	12	40	
Water	51341U	43	230 / 50 / 1	12	40	

Packed shipping info: Packed dimensions (LxPxA): 495 x 605 x 810 mm - Weight: 45 kg - Packed volume: 0,25 m<sup>3</sup>

\* Legs + 12-20 mm



513 x 557 x 811\*\* mm

### ICE TECH PS 52 R290

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51350U	54	230 / 50 / 1	25	48	
Water	51351U	53	230 / 50 / 1	25	48	

Packed shipping info: Packed dimensions (LxPxA): 536 x 580 x 945 mm - Weight: 58 kg - Packed volume: 0,29 m<sup>3</sup>

\*\* Legs + 105-155 mm



513 x 557 x 811\*\* mm

### ICE TECH PS 62 R290

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51360	64	230 / 50 / 1	30	55	
Water	51361	66	230 / 50 / 1	30	55	

Packed shipping info: Packed dimensions (LxPxA): 670 x 630 x 1070 mm - Weight: 62 kg - Packed volume: 0,45 m<sup>3</sup>

\*\* Legs + 105-155 mm



673 x 557 x 984\*\* mm

### ICE TECH PS 82 R290

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51390U	80	230 / 50 / 1	37	60	
Water	51391U	84	230 / 50 / 1	37	60	

Packed shipping info: Packed dimensions (LxPxA): 745 x 635 x 1130 mm - Weight: 74 kg - Packed volume: 0,53 m<sup>3</sup>

\*\* Legs + 105-155 mm



843 x 557 x 984\*\* mm

### ICE TECH PS 122

CONDENSATION SYSTEM	CODE	PRODUCTION (Kg./24h)	FREQUENCY & VOLTAGE (V/Hz/N)	STORAGE (Kg.)	NET WEIGHT (Kg.)	SPEC SHEET
Air	51310	122	230 / 50 / 1	50	80	
Water	51311	130	230 / 50 / 1	50	80	

Packed shipping info: Packed dimensions (LxPxA): 925 x 637 x 1125 mm - Weight: 86 kg - Packed volume: 0,66 m<sup>3</sup>

\*\* Legs + 105-155 mm